



НАПОРНЫЕ ХАРАКТЕРИСТИКИ

SB (I) 3

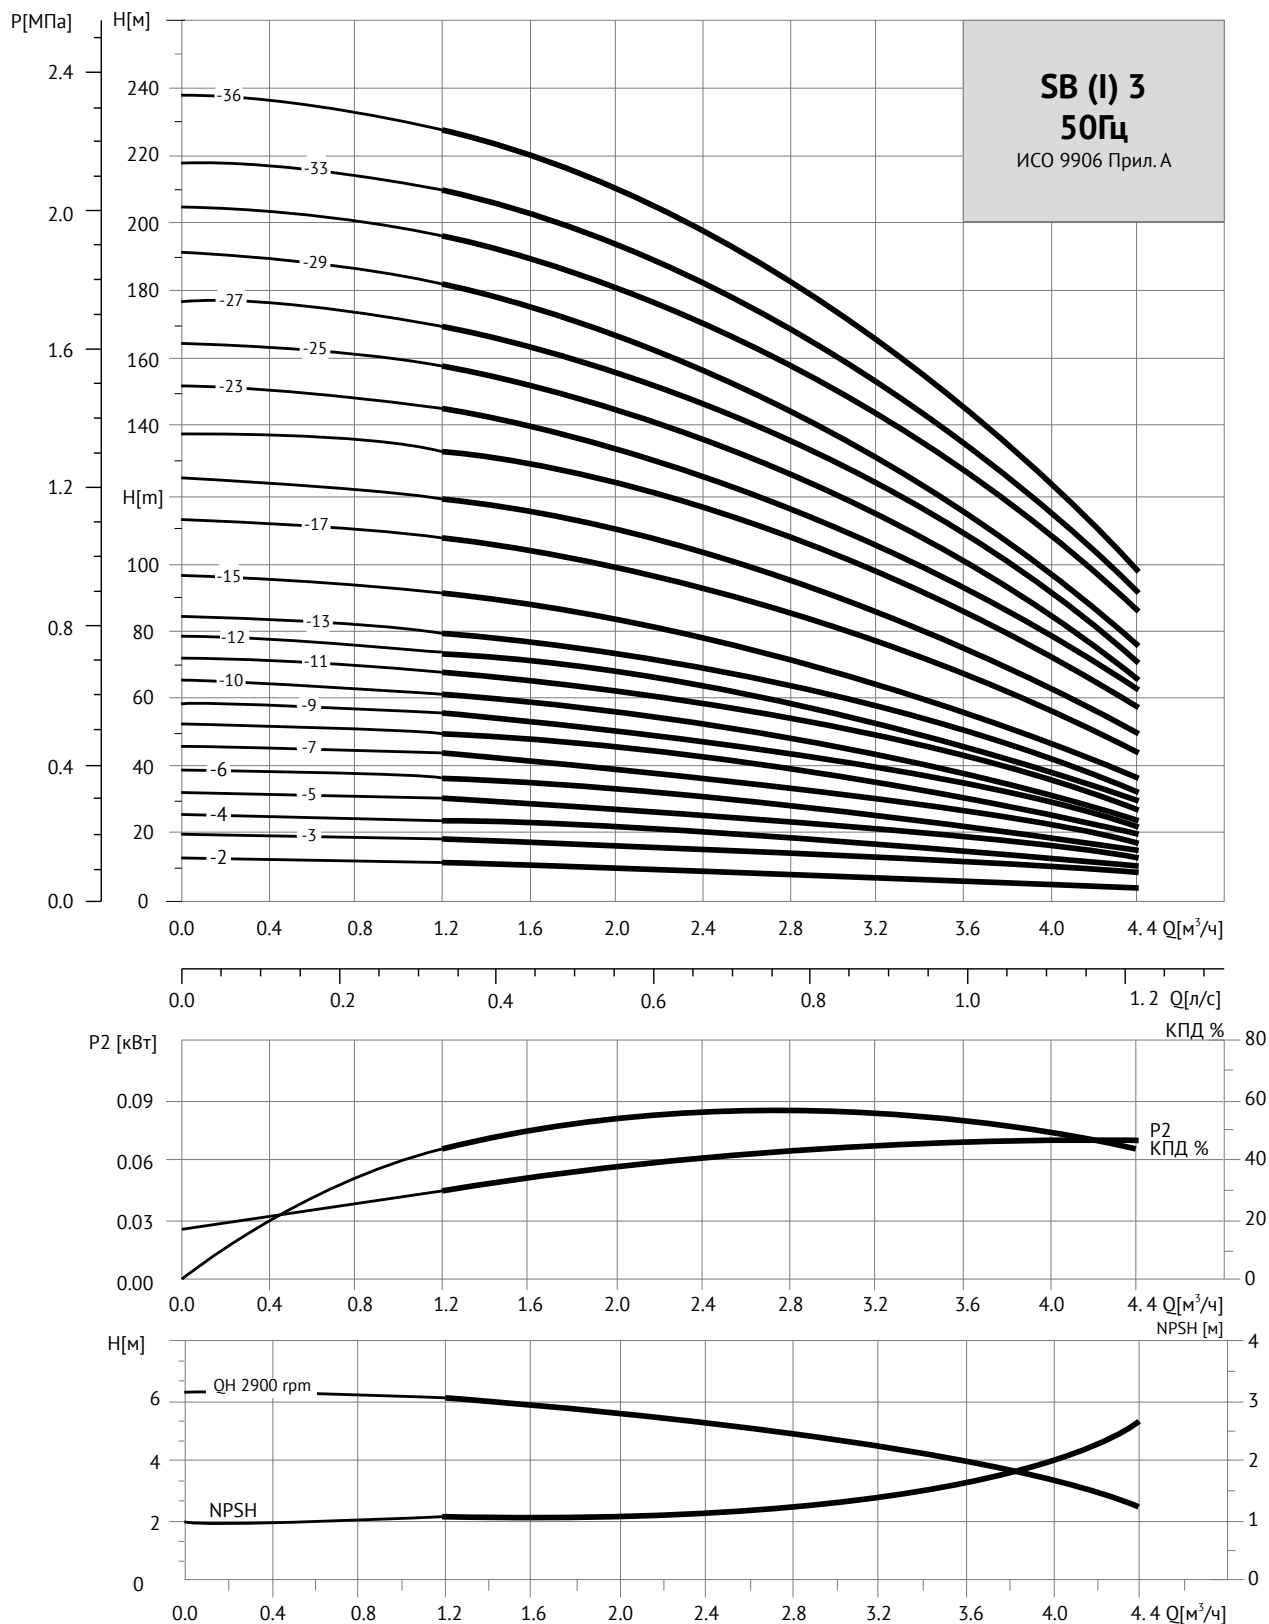

ТЕХНИЧЕСКИЕ ДАННЫЕ

Серия **SB (I) 3**

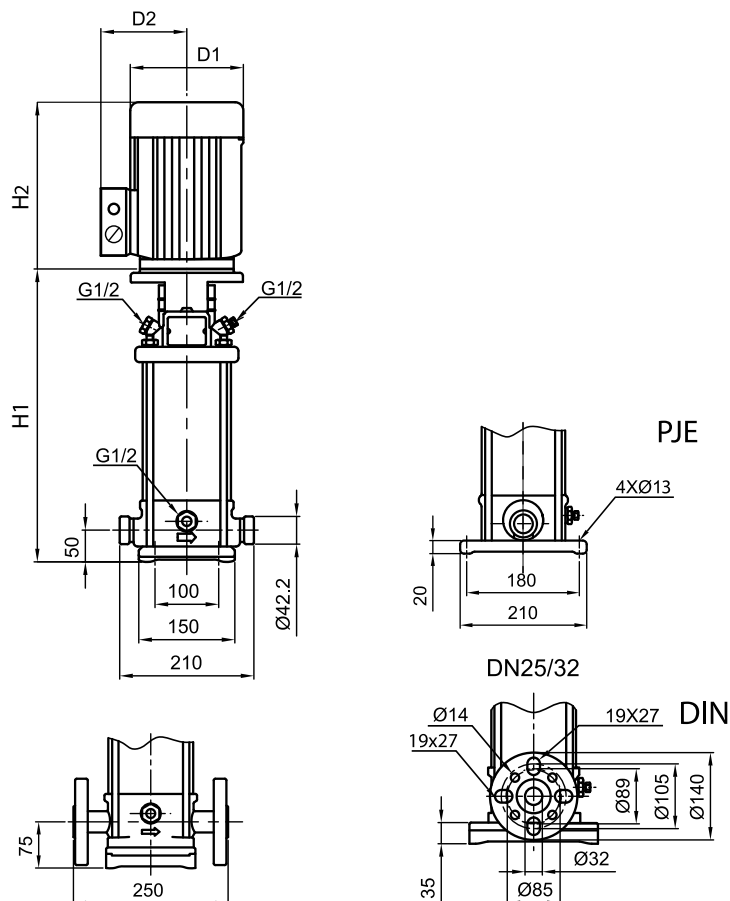

Данные электродвигателя, 3 × 380 В

Модель насоса	Мощность, кВт		«Коэффициент эффективности, cosφ»
	кВт	л.с.	
SB (I) 3-2	0,37	0,5	0,81
SB (I) 3-3	0,37	0,5	0,81
SB (I) 3-4	0,37	0,5	0,81
SB (I) 3-5	0,37	0,5	0,81
SB (I) 3-6	0,55	0,75	0,82
SB (I) 3-7	0,55	0,75	0,82
SB (I) 3-8	0,8	1,0	0,83
SB (I) 3-9	0,8	1,0	0,83
SB (I) 3-10	0,8	1,0	0,83
SB (I) 3-11	1,1	1,5	0,85
SB (I) 3-12	1,1	1,5	0,85
SB (I) 3-13	1,1	1,5	0,85
SB (I) 3-15	1,1	1,5	0,85
SB (I) 3-17	1,5	2,0	0,84
SB (I) 3-19	1,5	2,0	0,84
SB (I) 3-21	2,2	3,0	0,84
SB (I) 3-23	2,2	3,0	0,84
SB (I) 3-25	2,2	3,0	0,84
SB (I) 3-27	2,2	3,0	0,84
SB (I) 3-29	2,2	3,0	0,84
SB (I) 3-31	3,0	4,0	0,87
SB (I) 3-33	3,0	4,0	0,87
SB (I) 3-36	3,0	4,0	0,87

Габариты и вес

Модель насоса	Размеры, мм					Масса, кг
	H1	H2	H1 + H2	D1	D2	
SB 3-2	281	220	501	140	110	23
SB 3-3	281	220	501	140	110	23
SB 3-4	299	220	519	140	110	23
SB 3-5	317	220	537	140	110	24
SB 3-6	335	220	555	140	110	24
SB 3-7	353	220	573	140	110	25
SB 3-8	375	250	625	160	125	27
SB 3-9	393	250	643	160	125	28
SB 3-10	411	250	661	160	125	28
SB 3-11	429	250	679	160	125	31
SB 3-12	447	250	697	160	125	31
SB 3-13	465	250	715	160	125	32
SB 3-15	501	250	751	160	125	32
SB 3-17	553	290	843	180	125	38
SB 3-19	589	290	879	180	125	39
SB 3-21	625	290	915	180	125	41
SB 3-23	661	290	951	180	125	42
SB 3-25	697	290	987	180	125	43
SB 3-27	733	290	1023	290	125	44
SB 3-29	769	290	1059	290	125	45
SB 3-31	809	330	1139	330	140	51
SB 3-33	845	330	1175	330	140	52
SB 3-36	899	330	1229	330	140	54

Модель насоса	Размеры, мм					Масса, кг
	H1	H2	H1 + H2	D1	D2	
SB (I) 3-2	279	220	499	140	110	20
SB (I) 3-3	279	220	499	140	110	20
SB (I) 3-4	297	220	517	140	110	20
SB (I) 3-5	315	220	535	140	110	20
SB (I) 3-6	333	220	553	140	110	21
SB (I) 3-7	351	220	571	140	110	22
SB (I) 3-8	375	250	625	160	125	24
SB (I) 3-9	393	250	643	160	125	24
SB (I) 3-10	411	250	661	160	125	25
SB (I) 3-11	429	250	679	160	125	27
SB (I) 3-12	447	250	697	160	125	27
SB (I) 3-13	465	250	715	160	125	28
SB (I) 3-15	501	250	751	160	125	28
SB (I) 3-17	553	290	843	180	125	35
SB (I) 3-19	589	290	879	180	125	35
SB (I) 3-21	625	290	915	180	125	38
SB (I) 3-23	661	290	951	180	125	39
SB (I) 3-25	697	290	987	180	125	40
SB (I) 3-27	733	290	1023	290	125	41
SB (I) 3-29	769	290	1059	290	125	41
SB (I) 3-31	809	330	1139	330	140	48
SB (I) 3-33	845	330	1175	330	140	48
SB (I) 3-36	899	330	1229	330	140	50