



НАПОРНЫЕ ХАРАКТЕРИСТИКИ

SB (I) 64

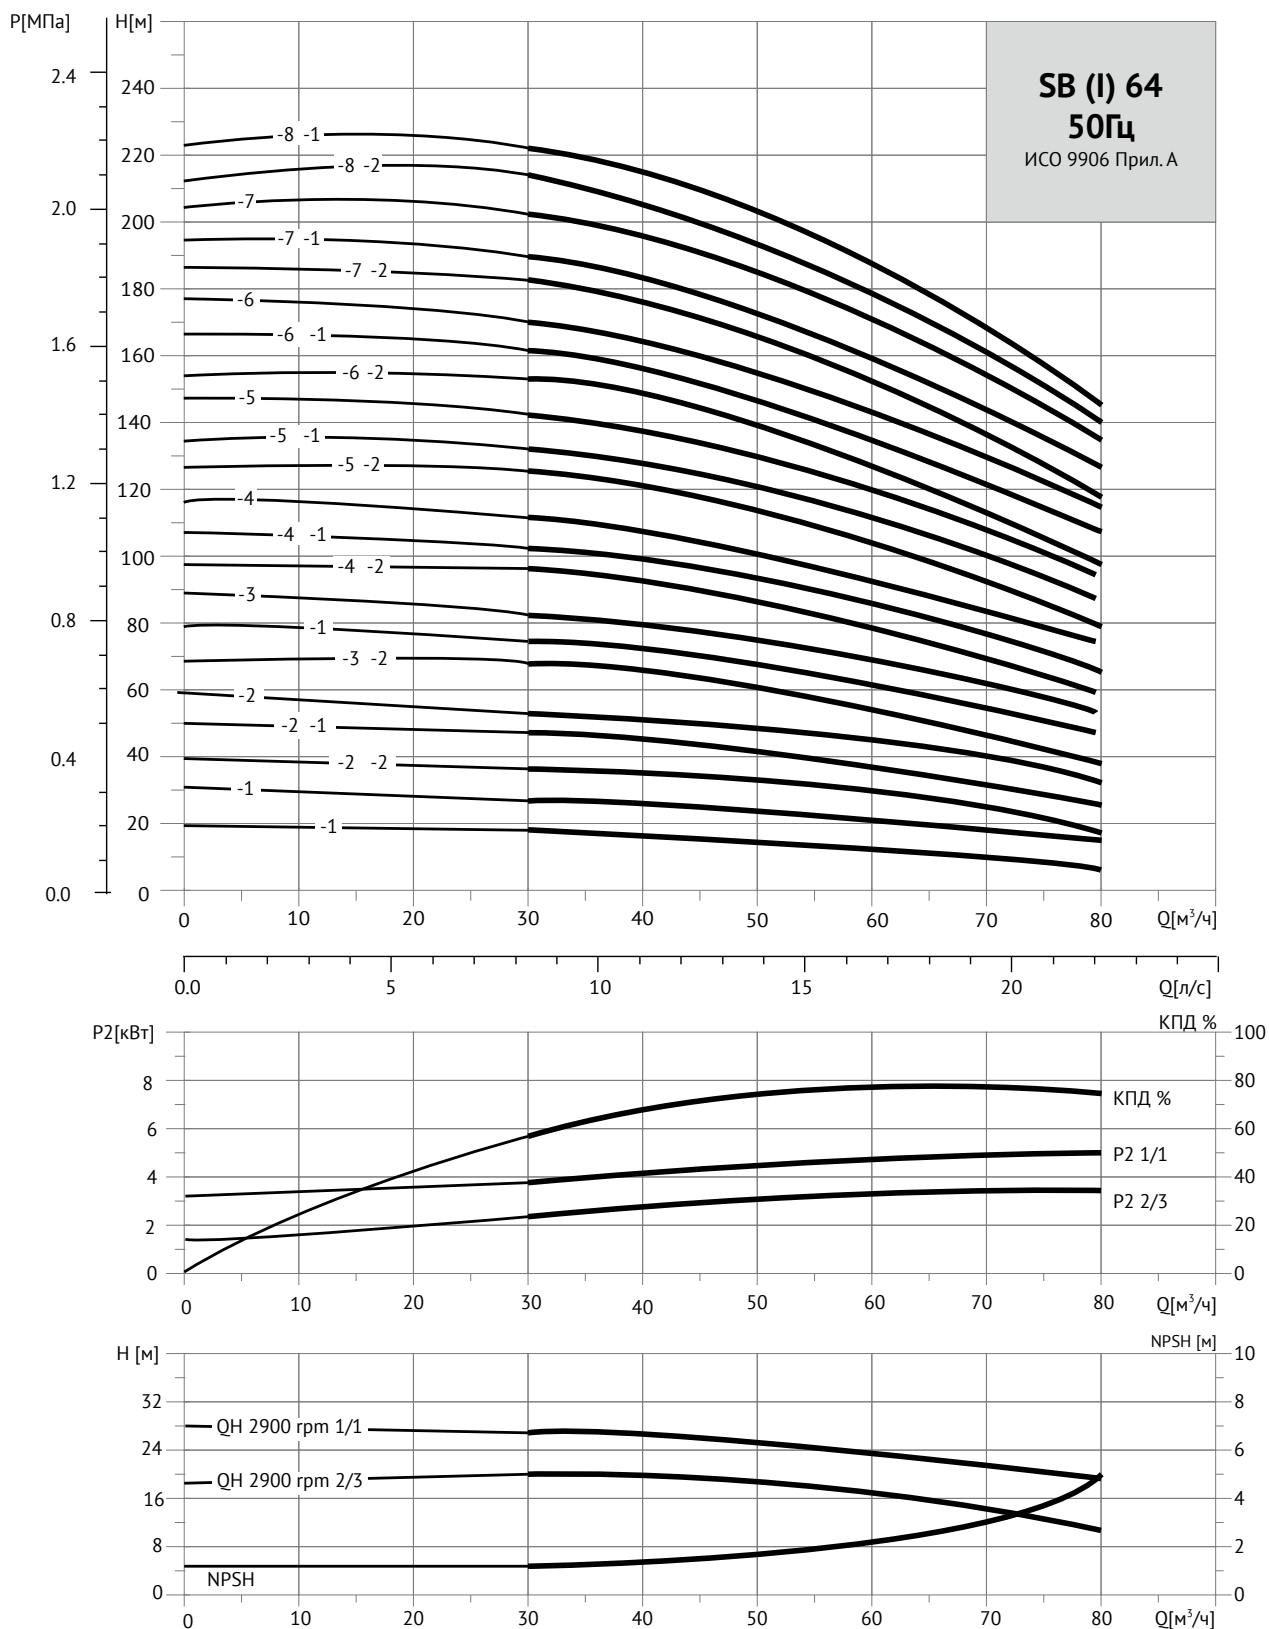

ТЕХНИЧЕСКИЕ ДАННЫЕ

Серия **SB (I) 64**

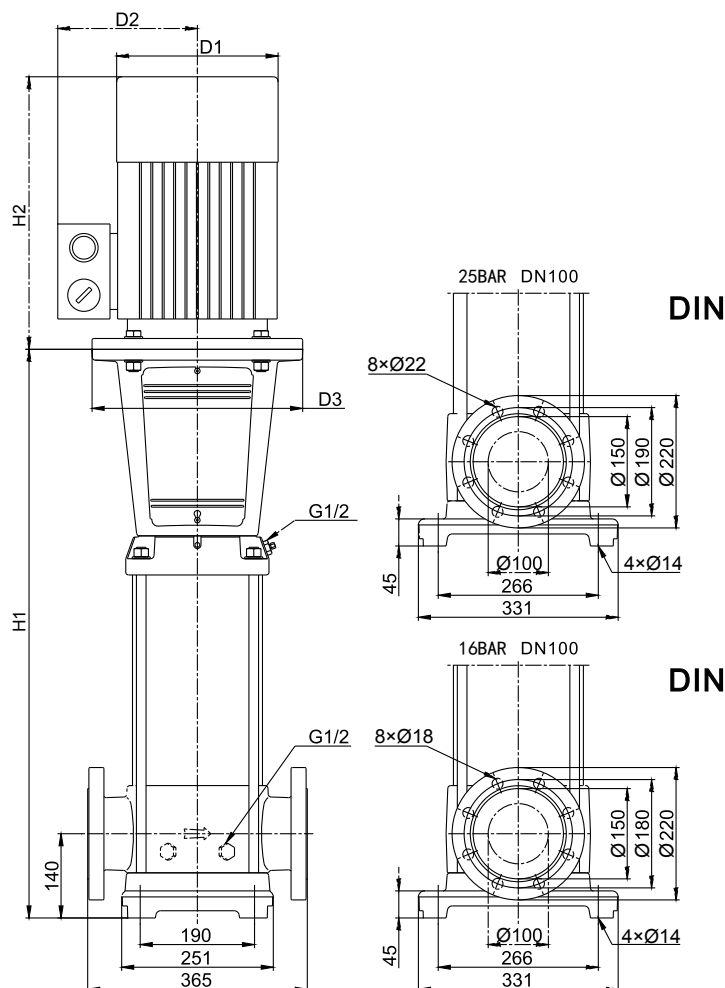

Данные электродвигателя, 3 × 380 В

Модель насоса	Мощность, кВт		«Коэффициент эффективности, cosφ»
	кВт	л.с.	
SB (I) 64-1-1	4,0	5,5	0,88
SB (I) 64-1	5,5	7,5	0,88
SB (I) 64-2-2	7,5	10	0,88
SB (I) 64-2-1	11	15	0,89
SB (I) 64-2	11	15	0,89
SB (I) 64-3-2	15	20	0,90
SB (I) 64-3-1	15	20	0,90
SB (I) 64-3	18,5	25	0,90
SB (I) 64-4-2	18,5	25	0,90
SB (I) 64-4-1	22	30	0,90
SB (I) 64-4	22	30	0,90
SB (I) 64-5-2	30	45	0,90
SB (I) 64-5-1	30	45	0,90
SB (I) 64-5	30	45	0,90
SB (I) 64-6-2	30	45	0,90
SB (I) 64-6-1	37	50	0,90
SB (I) 64-6	37	50	0,90
SB (I) 64-7-2	37	50	0,90
SB (I) 64-7-1	37	50	0,90
SB (I) 64-7	45	60	0,90
SB (I) 64-8-2	45	60	0,90
SB (I) 64-8-1	45	60	0,90

Габариты и вес

Модель насоса	Размеры, мм						Масса, кг
	H1	H2	H1+H2	D1	D2	D3	
SB 64-1-1	561	330	891	220	150	160	110
SB 64-1	561	420	981	260	210	300	115
SB 64-2-2	644	420	1064	260	210	300	124
SB 64-2-1	754	500	1254	330	260	350	163
SB 64-2	754	500	1254	330	260	350	163
SB 64-3-2	836	500	1336	330	260	350	205
SB 64-3-1	836	500	1336	330	260	350	205
SB 64-3	836	550	1386	380	310	350	215
SB 64-4-2	919	550	1469	380	310	350	215
SB 64-4-1	919	600	1519	380	310	350	270
SB 64-4	919	600	1519	380	310	350	270
SB 64-5-2	1001	660	1661	420	350	400	352
SB 64-5-1	1001	660	1661	420	350	400	352
SB 64-5	1001	660	1661	420	350	400	352
SB 64-6-2	1084	660	1744	420	350	400	358
SB 64-6-1	1084	660	1744	420	350	400	377
SB 64-6	1084	660	1744	420	350	400	377
SB 64-7-2	1166	660	1826	420	350	400	382
SB 64-7-1	1166	660	1826	420	350	400	382
SB 64-7	1166	710	1876	470	375	450	446
SB 64-8-2	1248	710	1958	470	375	450	452
SB 64-8-1	1248	710	1958	470	375	450	452

Модель насоса	Размеры, мм						Масса, кг
	H1	H2	H1+H2	D1	D2	D3	
SB (I) 64-1-1	561	330	891	220	150	160	110
SB (I) 64-1	561	420	981	260	210	300	115
SB (I) 64-2-2	644	420	1064	260	210	300	124
SB (I) 64-2-1	754	500	1254	330	260	350	163
SB (I) 64-2	754	500	1254	330	260	350	163
SB (I) 64-3-2	836	500	1336	330	260	350	205
SB (I) 64-3-1	836	500	1336	330	260	350	205
SB (I) 64-3	836	550	1386	380	310	350	215
SB (I) 64-4-2	919	550	1469	380	310	350	215
SB (I) 64-4-1	919	600	1519	380	310	350	270
SB (I) 64-4	919	600	1519	380	310	350	270
SB (I) 64-5-2	1001	660	1661	420	350	400	352
SB (I) 64-5-1	1001	660	1661	420	350	400	352
SB (I) 64-5	1001	660	1661	420	350	400	352
SB (I) 64-6-2	1084	660	1744	420	350	400	358
SB (I) 64-6-1	1084	660	1744	420	350	400	377
SB (I) 64-6	1084	660	1744	420	350	400	377
SB (I) 64-7-2	1166	660	1826	420	350	400	382
SB (I) 64-7-1	1166	660	1826	420	350	400	382
SB (I) 64-7	1166	710	1876	470	375	450	446
SB (I) 64-8-2	1248	710	1958	470	375	450	452
SB (I) 64-8-1	1248	710	1958	470	375	450	452