



НАПОРНЫЕ ХАРАКТЕРИСТИКИ

SB (I) 5

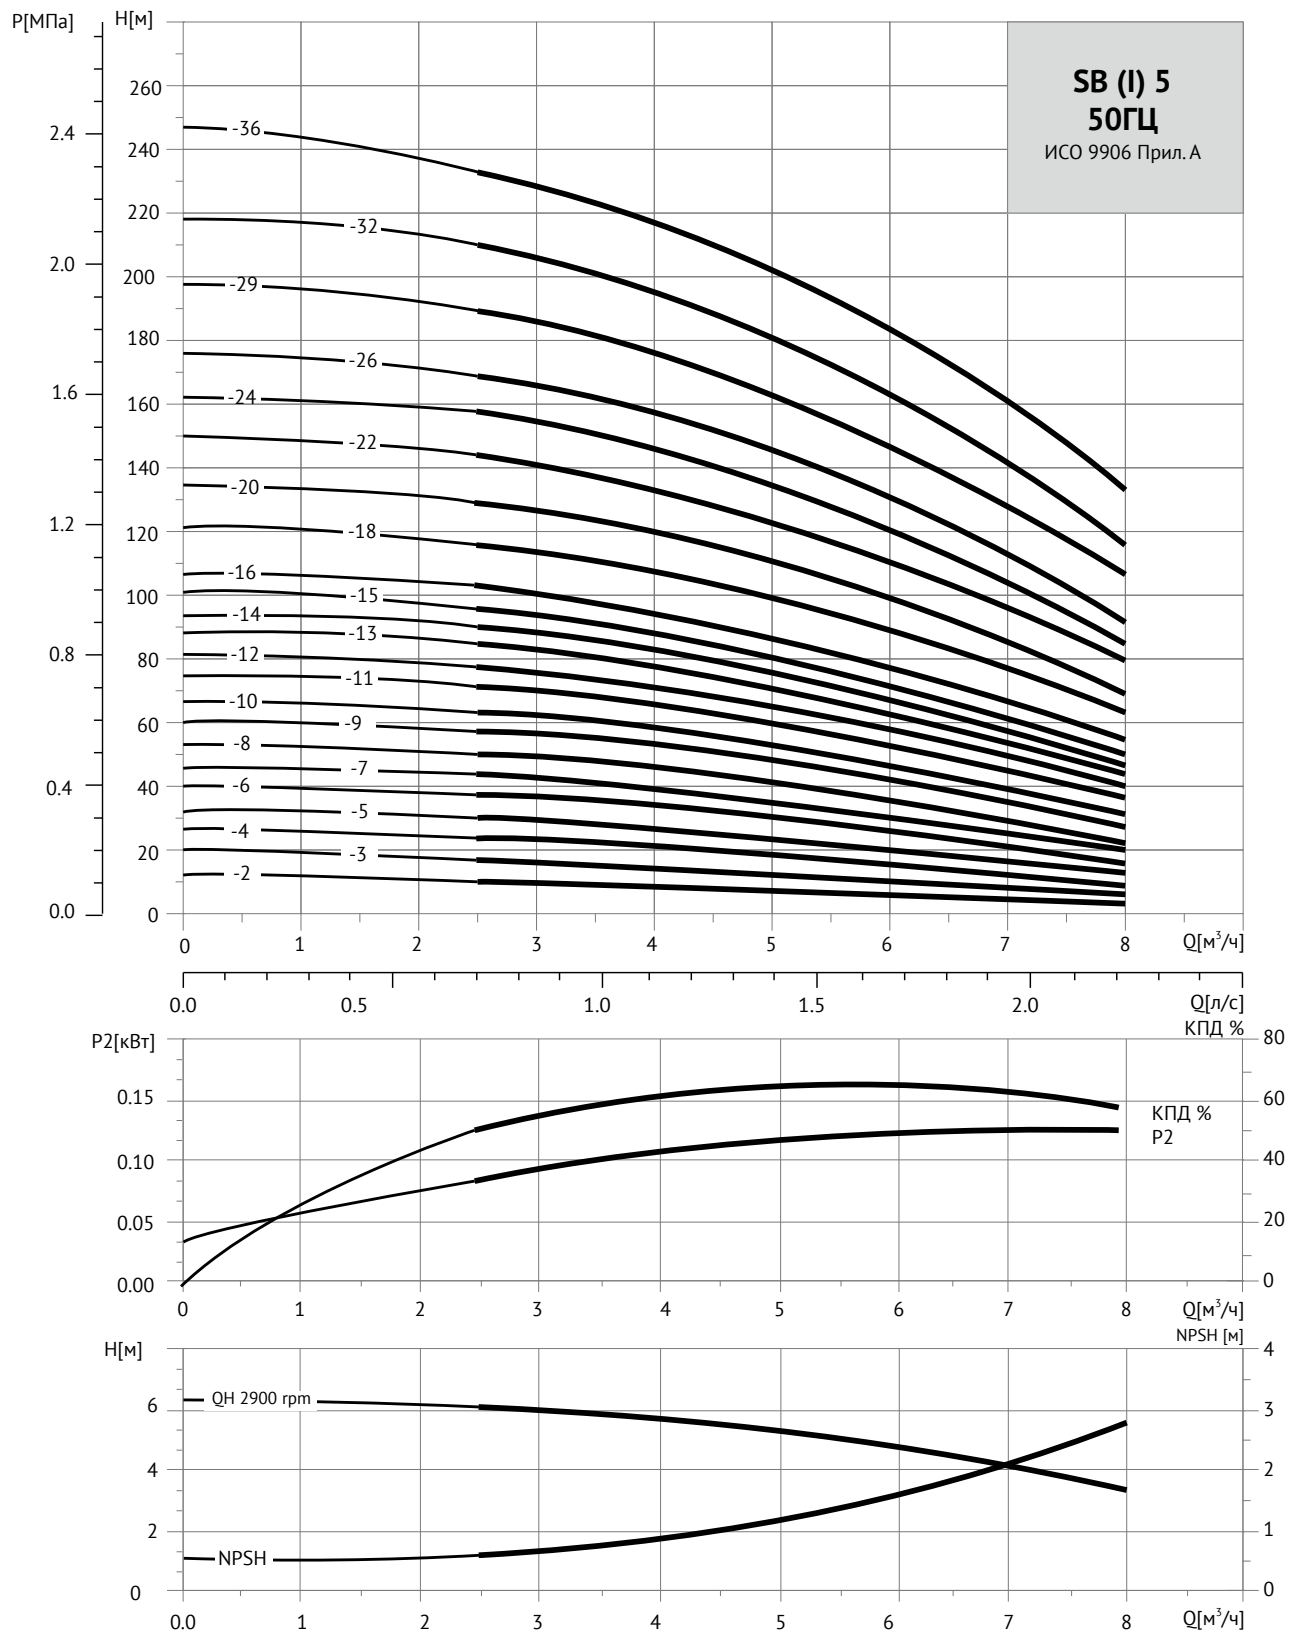

ТЕХНИЧЕСКИЕ ДАННЫЕ

Серия **SB (I) 5**

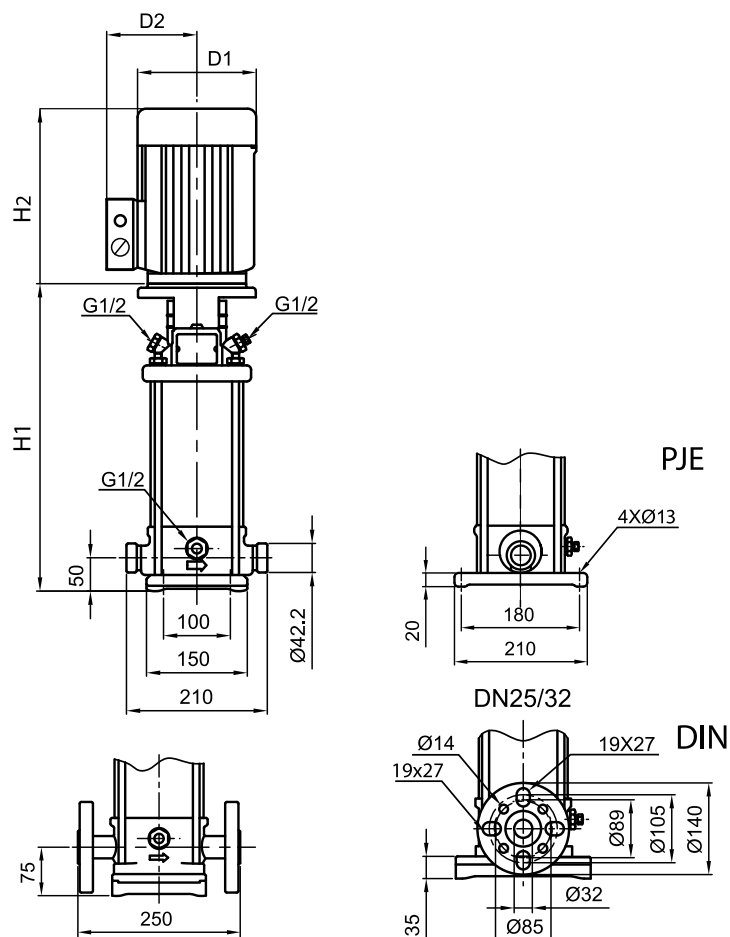

Данные электродвигателя, 3 × 380 В

Модель насоса	Мощность, кВт		«Коэффициент эффективности, cosφ»
	кВт	л.с.	
SB (I) 5-2	0,37	0,5	0,81
SB (I) 5-3	0,55	0,75	0,82
SB (I) 5-4	0,55	0,75	0,82
SB (I) 5-5	0,75	1,0	0,83
SB (I) 5-6	1,1	1,5	0,85
SB (I) 5-7	1,1	1,5	0,85
SB (I) 5-8	1,1	1,5	0,85
SB (I) 5-9	1,5	2,0	0,84
SB (I) 5-10	1,5	2,0	0,84
SB (I) 5-11	2,2	3,0	0,84
SB (I) 5-12	2,2	3,0	0,84
SB (I) 5-13	2,2	3,0	0,84
SB (I) 5-14	2,2	3,0	0,84
SB (I) 5-15	2,2	3,0	0,84
SB (I) 5-16	2,2	3,0	0,84
SB (I) 5-18	3,0	4,0	0,87
SB (I) 5-20	3,0	4,0	0,87
SB (I) 5-22	4,0	5,5	0,88
SB (I) 5-24	4,0	5,5	0,88
SB (I) 5-26	4,0	5,5	0,88
SB (I) 5-29	4,0	5,5	0,88
SB (I) 5-32	5,5	7,5	0,88
SB (I) 5-36	5,5	7,5	0,88

Габариты и вес

Модель насоса	Размеры, мм						Масса, кг
	H1	H2	H1 + H2	D1	D2	D3	
SB 5-2	279	220	499	140	110	-	23
SB 5-3	306	220	526	140	110	-	23
SB 5-4	333	220	553	140	110	-	24
SB 5-5	366	250	616	160	125	-	27
SB 5-6	393	250	643	160	125	-	29
SB 5-7	420	250	670	160	125	-	29
SB 5-8	447	250	697	160	125	-	30
SB 5-9	490	290	780	180	125	-	37
SB 5-10	517	290	807	180	125	-	37
SB 5-11	544	290	834	180	125	-	39
SB 5-12	571	290	861	180	125	-	40
SB 5-13	598	290	888	180	125	-	40
SB 5-14	625	290	915	180	125	-	41
SB 5-15	652	290	942	180	125	-	42
SB 5-16	679	290	969	180	125	-	42
SB 5-18	737	330	1067	190	140	-	49
SB 5-20	791	330	1121	190	140	-	50
SB 5-22	845	330	1175	220	150	-	60
SB 5-24	899	330	1229	220	150	-	62
SB 5-26	953	330	1283	220	150	-	63
SB 5-29	1034	330	1364	220	150	-	65
SB 5-32	1145	420	1565	260	210	300	80
SB 5-36	1253	420	1673	260	210	300	83

Модель насоса	Размеры, мм						Масса, кг
	H1	H2	H1 + H2	D1	D2	D3	
SB (I) 5-2	279	220	499	140	110	-	20
SB (I) 5-3	306	220	526	140	110	-	21
SB (I) 5-4	333	220	553	140	110	-	21
SB (I) 5-5	366	250	616	160	125	-	24
SB (I) 5-6	393	250	643	160	125	-	26
SB (I) 5-7	420	250	670	160	125	-	27
SB (I) 5-8	447	250	697	160	125	-	27
SB (I) 5-9	490	290	780	180	125	-	34
SB (I) 5-10	517	290	807	180	125	-	34
SB (I) 5-11	544	290	834	180	125	-	36
SB (I) 5-12	571	290	861	180	125	-	37
SB (I) 5-13	598	290	888	180	125	-	37
SB (I) 5-14	625	290	915	180	125	-	38
SB (I) 5-15	652	290	942	180	125	-	39
SB (I) 5-16	679	290	969	180	125	-	39
SB (I) 5-18	737	330	1067	190	140	-	46
SB (I) 5-20	791	330	1121	190	140	-	47
SB (I) 5-22	845	330	1175	220	150	-	57
SB (I) 5-24	899	330	1229	220	150	-	59
SB (I) 5-26	953	330	1283	220	150	-	60
SB (I) 5-29	1034	330	1364	220	150	-	62
SB (I) 5-32	1145	420	1565	260	210	300	77
SB (I) 5-36	1253	420	1673	260	210	300	80